



ASA872R

■ 技术源自德国
■ 驱动民族工业



ASA872R

1.8

3A

0 3A 3A 0
10 2000 /
0.3A 3A

24-80VAC 36-110VDC



PUL / DIR/ (ENA) 5V~24VDC

4 6 8

60/86mm

. *0= 7.2=

ASA872R(24-80VAC 36-110VDC)

100W 120W 20% 40% 100W
140W
P1:SW1-SW3
SW1~SW3 8 2.4A~7.2A



1
2
3



P1:SW4
SW4 OFF 50%
ON 90%
SW4 OFF 60% 36%

P1:SW5-SW8

SW5~SW8 16 400~51200 /



.....4

1.4

2.4

3.4

.....4

1.4

2.5

3.5

4.5

.....6

1.6

2.7

3.8

4.8

.....9

1.9

2.10

.....10

.....10

1.11

2.11

.....12

.....13

.....14

1.14

2.15

.....16

ASA872R

1.

ASA872R

32 DSP

400~51200

2.

32 DSP

4 6 8

3.

1.

500KHz 200KHz
2.4~7.2A
400-51200

	ASA872R			
	2.4	-	7.2	A
	24	48	80	VAC
	6	10	16	mA
	4.5	5	28	VDC
	1.5	-	-	s
	0	-	200	KHz
	500			


2.

--	--

		-5 +50
		40 90%RH
		5.9m/s2MAX
		-20 80
		1000

0.54 85.584 15.6 reW* n ref22.7 0.47998 0.48 > BDC 429.98 426

汉德保电机







SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
-----	-----	-----	-----	-----	-----	-----	-----

汉德保电机

$P=I^2R$

<40

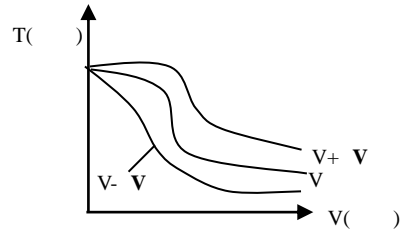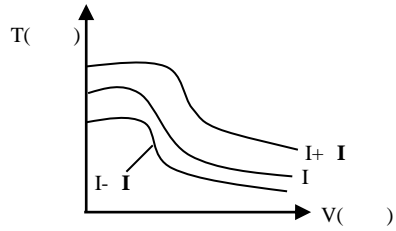


- 50%
- 100%
- 70%
- 140%

2.


15-30	>70
-------	-----

6 8

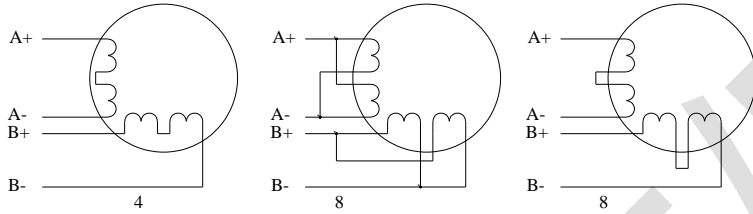

ASA872R 86
ASA872R

A+ A

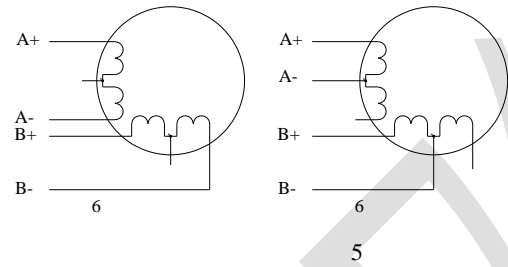

1
2


57 86

A+ A- B+ B-

3404HS60U14

3.

1

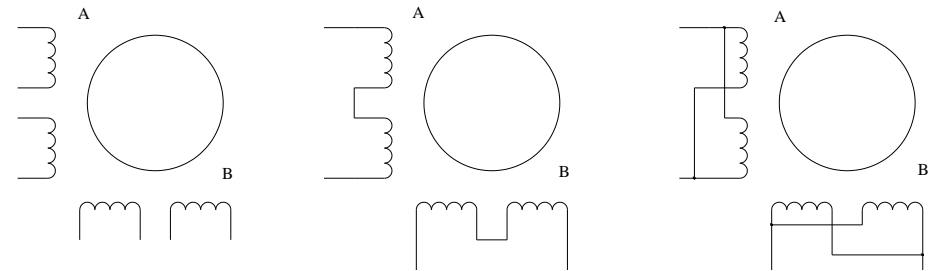

2

3 ASA872R

4

1

1 3

2

ASA872R

90VAC

2 3

3

ASA872R

20VAC

2 3

1.

1			
2			

文德