



DBL-48100H


■ 技术源自德国
■ 驱动民族工业





DBL-48100H

×



30

10CM

o

o



DBL-48100H

1

2




3


3 (: mm)

1

2


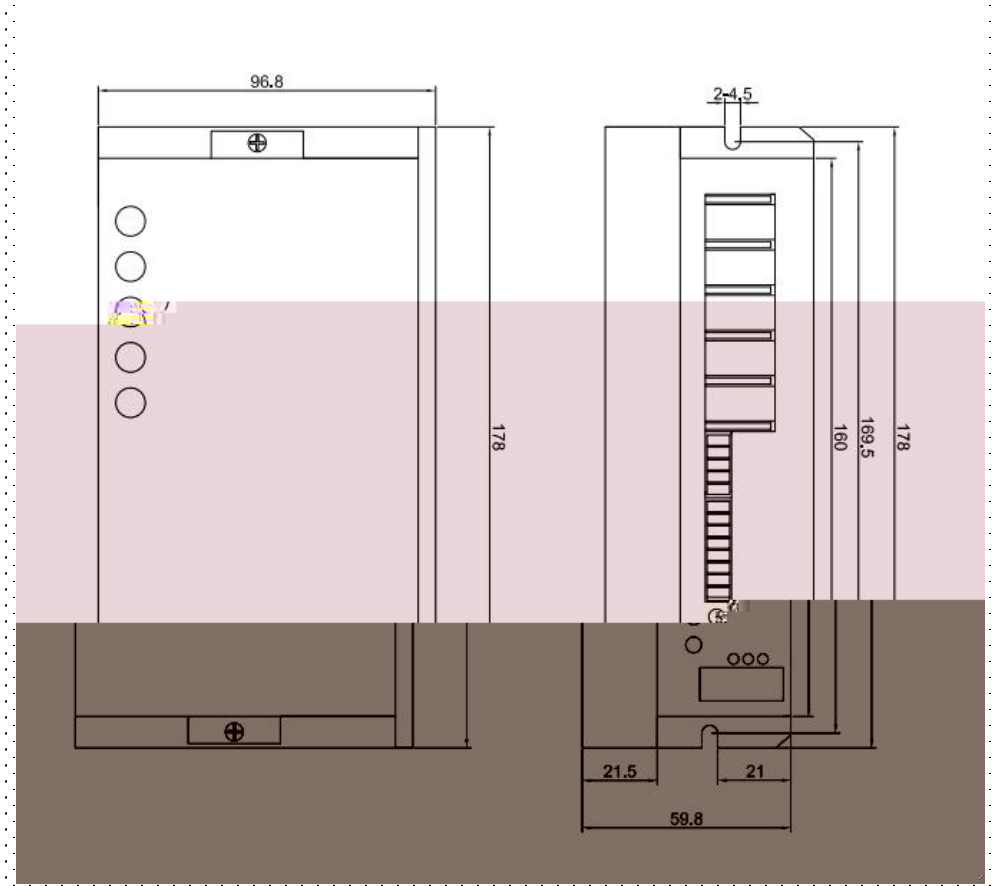


1.

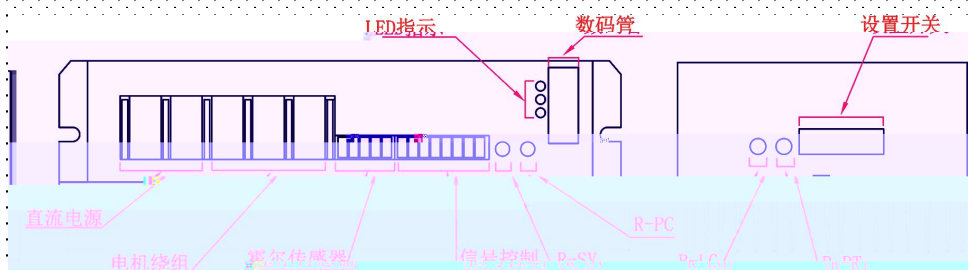

1 DC

			+37VDC~+55VDC
	VP		
	GND		0V
	U		
	V		
	W		



2

	GND		
	Hu		
	Hv		
	Hw		
	+6.25V		

3)

	GND		
	F/R		
	EN		
	BK		
	SV		
	PG		
	ALM		
	+6.25V		

4)LED


2 **F/R**

3 **EN**

4 **BK**


LED		

1 **GND**

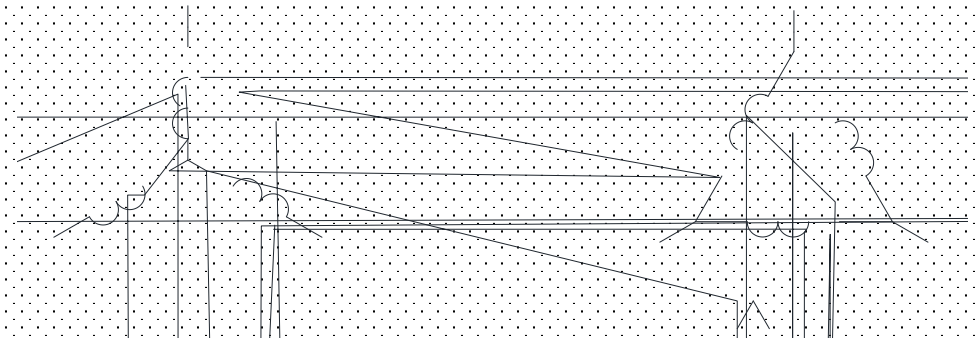

F


5 SV

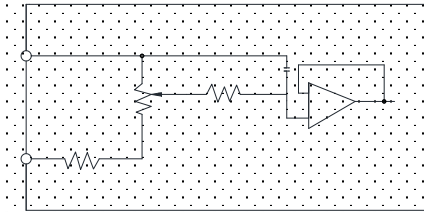

6 PG

1 R-SV



2

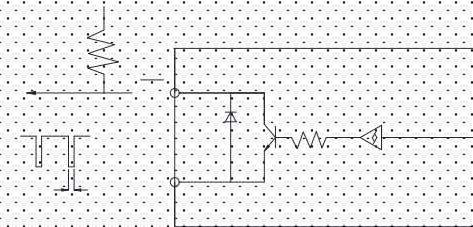

3


7 ALM

4

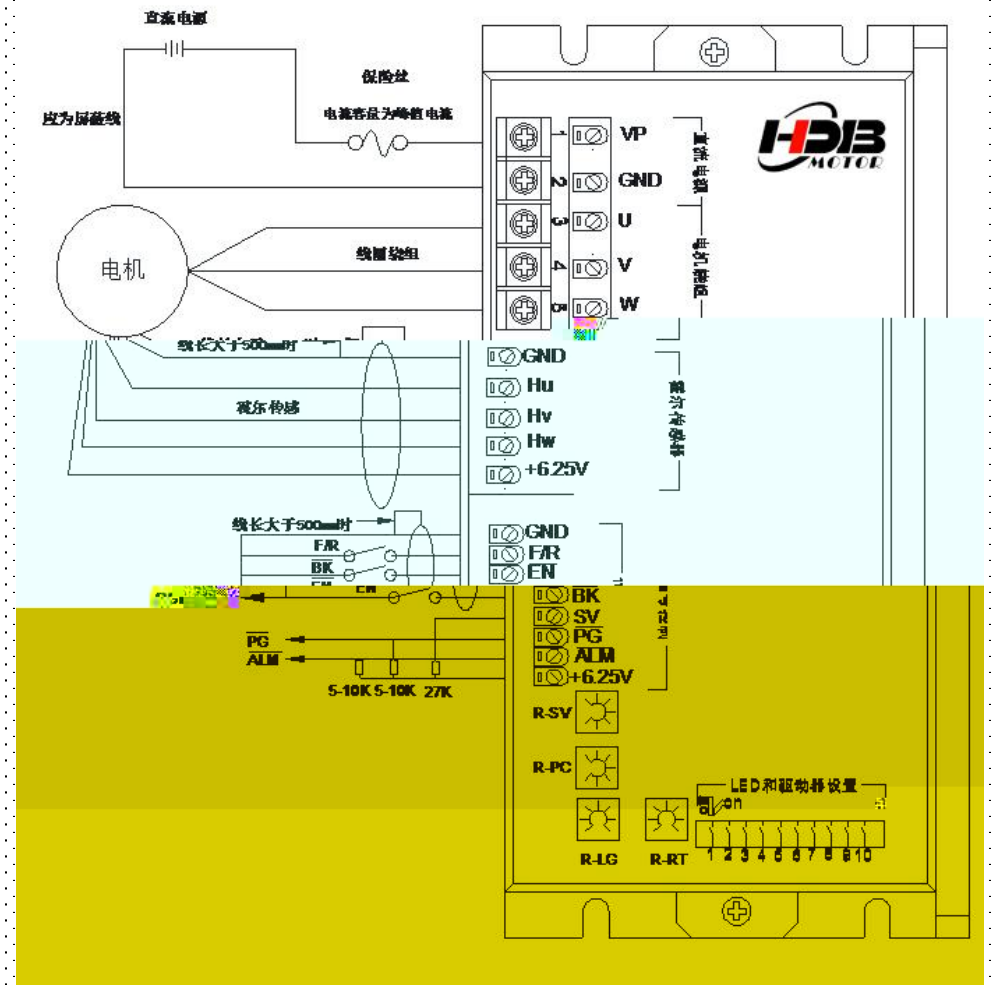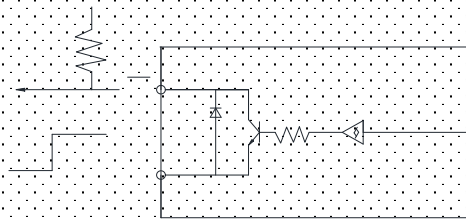

SW

o o

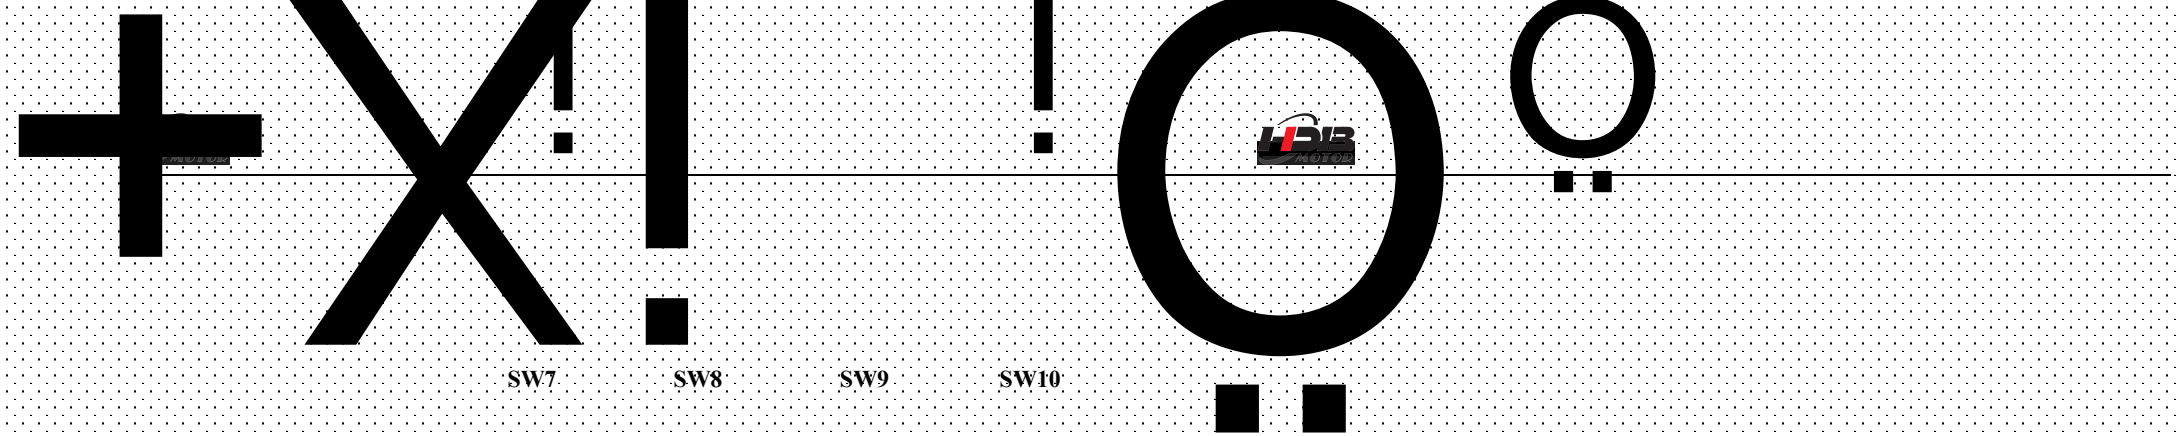


SW7

SW8

SW9

SW10

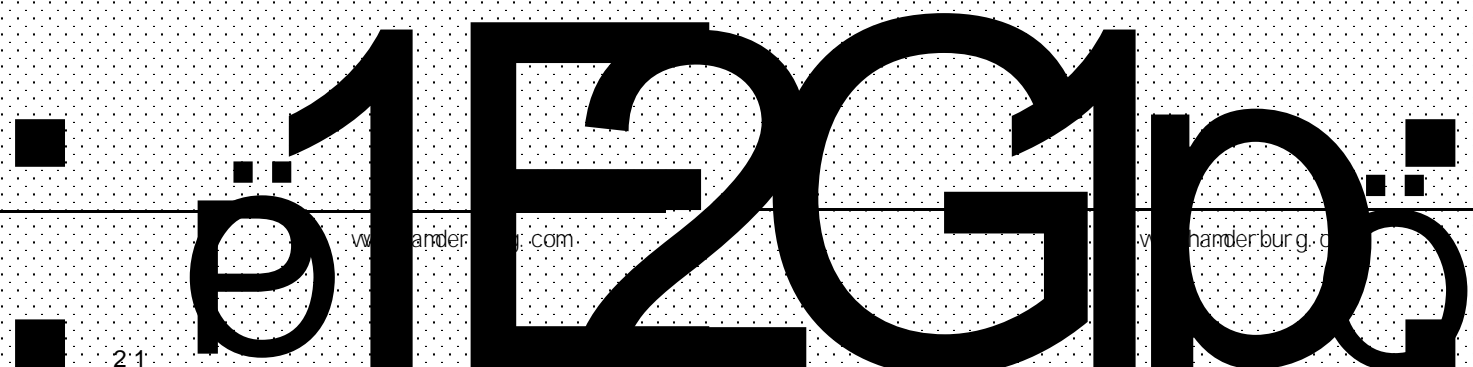

111

21



